Supporting Information

3D Printing of PDMS Improves its Mechanical and Cell Adhesion Properties

Veli Ozbolat^{1,2,3}, Madhuri Dey^{2,4}, Bugra Ayan^{1,2}, Adomas Povilianskas¹, Melik C. Demirel^{1,2,6} and Ibrahim T. Ozbolat^{1,2,5,6,*}

¹Engineering Science and Mechanics Department, Penn State University, University Park, PA 16802, USA,

²The Huck Institutes of the Life Sciences, Penn State University, University Park, PA 16802, USA,

³Mechanical Engineering Department, Ceyhan Engineering Faculty, Cukurova University, Adana 01950, Turkey,

⁴Chemistry Department, Penn State University, University Park, PA 16802, USA,

⁵Biomedical Engineering Department, Penn State University, University Park, PA 16802, USA,

⁶Materials Research Institute, Penn State University, University Park, PA 16802, USA,

* Corresponding author, Email: ito1@psu.edu

3 Pages total

2 Figures

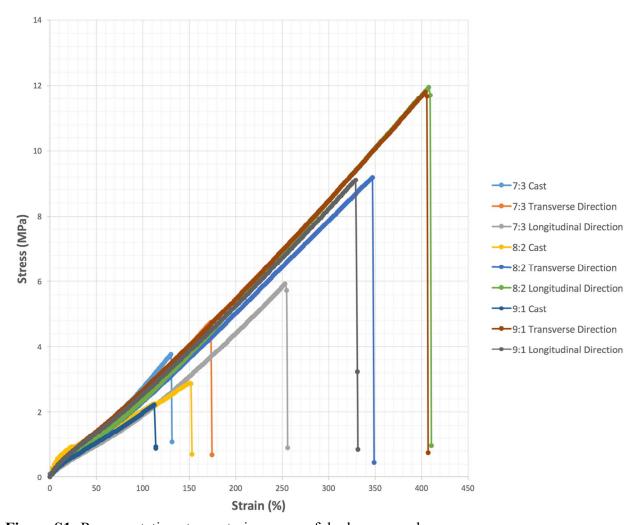


Figure S1: Representative stress-strain curves of dogbone samples.

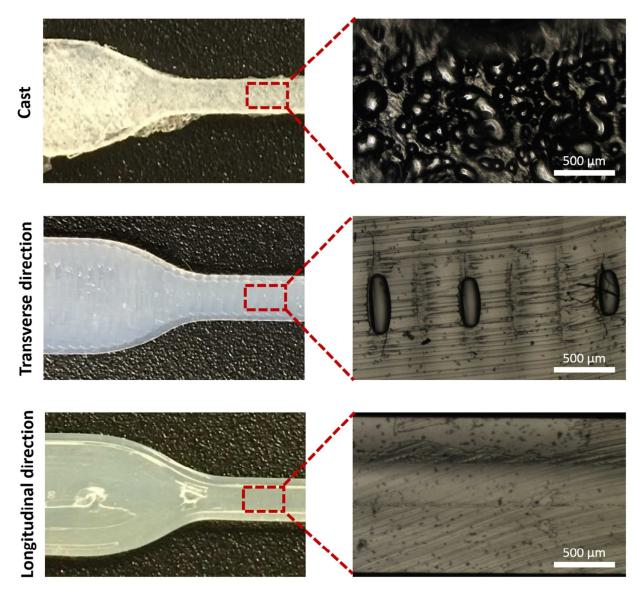


Figure S2. Representative microscopic images of tested dogbone samples (Ink 9:1) showing pores in their neck section. Cast samples (top-right image) show considerable number of large pores while printed ones exhibit small pores. Large (but a very few in quantity) void sections were also observed between the fibers of samples printed in transverse direction (middle-right image).