

Supporting Information

Self-sufficient bioethanol production system using a lignin-derived adsorbent of fermentation inhibitors

Koichi Yoshioka^a, Masakazu Daidai^b, Yoshihiro Matsumoto^a, Rie Mizuno^a, Yoko Katsura^b, Tatsuya Hakogi^c, Hideshi Yanase^c and Takashi Watanabe^{a}*

^aLaboratory of Biomass Conversion, Research Institute for Sustainable Humanosphere, Kyoto University, Gokasho, Uji, Kyoto 611-0011, Japan

^b Japan Chemical Engineering & Machinery Co. Ltd.4-6-23 Kashima, Yodogawaku, Osaka, Osaka 332-0012, Japan

^c Department of Chemistry and Biotechnology, Graduate School of Engineering, Tottori University, 4-101 Koyamacho-Minami, Tottori, Tottori 680-8552, Japan

*Corresponding author information: E-mail: twatanab@rsh.kyoto-u.ac.jp

Number of pages: 2

Number of Figure: 1

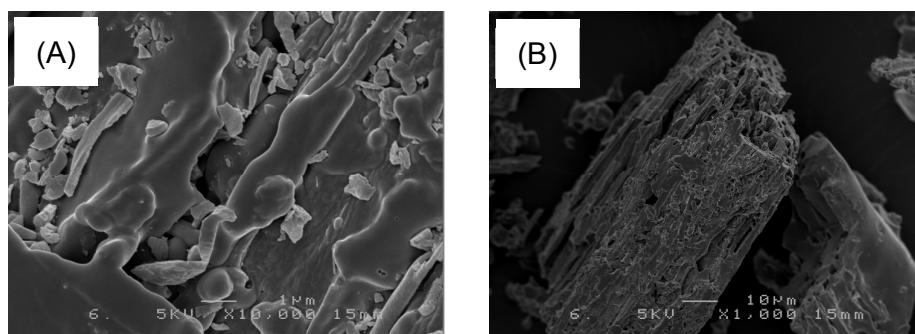


Figure S1. SEM images of the recycled adsorbents (Entry 9 in Table 1) prepared by thermal treatment of at 350 °C for 1 h under oxygen atmosphere with 10,000 (A) and 1,000 (B) magnifications.