

Supporting Information

Facile Preparation of Cu/Ag Core/Shell Electrospun Nanofibers as Highly Stable and Flexible Transparent Conductive Electrodes for Optoelectronic Devices

Dai-Hua Jiang,^{a,b,c, +} Ping-Chun Tsai,^{a, +} Chi-Ching Kuo,^{a,d, *} Fu-Cheng Jhuang,^a Hao-Cheng Guo,^a Shih-Pin Chen,^e Ying-Chih Liao,^e Toshifumi Satoh,^{c, *,} and Shih-Huang Tung^{b, *}

^a Institute of Organic and Polymeric Materials, National Taipei University of Technology, Taipei, Taiwan.

^b Institute of Polymer Science and Engineering, National Taiwan University, 106 Taipei, Taiwan

^c Faculty of Engineering and Graduate School of Chemical Sciences and Engineering, Hokkaido University, Sapporo 060-8628, Japan

^d Research and Development Center for Smart Textile Technology, National Taipei University of Technology, 10608 Taipei, Taiwan.

^e Department of Chemical Engineering, National Taiwan University, Taipei, Taiwan

+ D.-H. Jiang and P.-C. Tsai contributed equally to this work

*Author to whom all correspondence should be addressed

● Tel.: 886-2-27712171 (ext. 2407); Fax: 886-2-27317174

Correspondence to: *Prof. C.-C. Kuo kuocc@mail.ntut.edu.tw

*Prof. T. Satoh satoh@eng.hokudai.ac.jp

*Prof. S.-H. Tung shtung@ntu.edu.tw

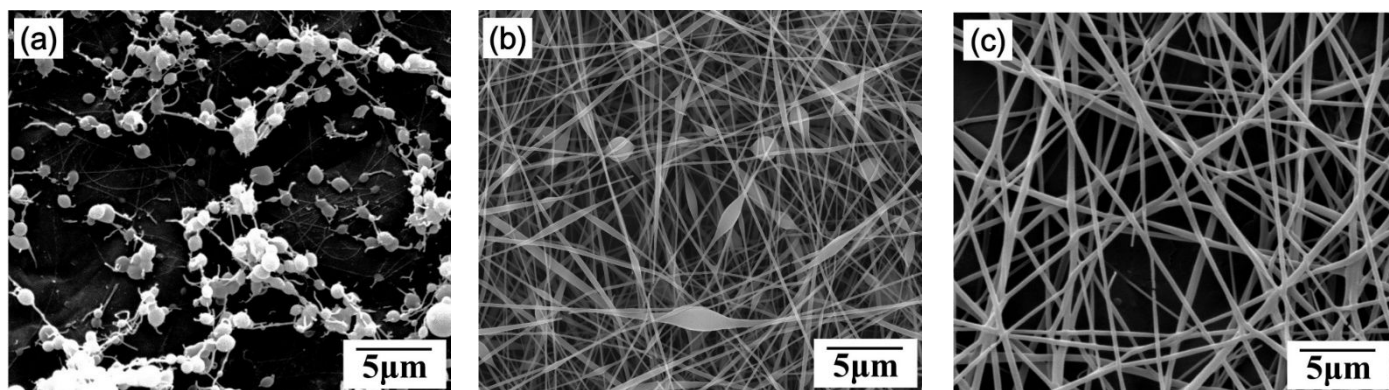


Figure S1. FE-SEM images of CuAc₂/PVP electrospun nanofibers with various concentrations: (a) 10 wt%, (b) 15 wt%, and (c) 20 wt%.

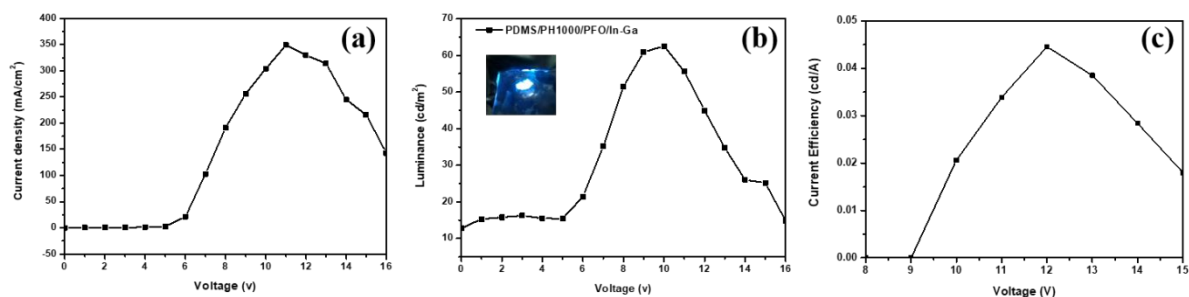


Figure S2. (a) Current density-voltage, (b) Luminance-voltage, (c) Current efficiency-voltage.