Wettability Alteration in Low-Permeability Sandstone Reservoirs by

"SiO2-Rhamnolipid" Nanofluid

Di Wang^{a,d}, Shanshan Sun^{a,c*}, Kai Cui^a, Hailan Li^a, Yejing Gong^a, Jirui Hou^b,

Zhongzhi Zhanga

^a State Key Laboratory of Heavy Oil Processing, China University of Petroleum,

Beijing, 102249, P. R. China

^b Research Institute of Enhanced Oil Recovery, China University of Petroleum,

Beijing, P. R. China

^c Petroleum Engineering College of Yangtze University, WuHan, HuBei, P. R. China

^d Shenyang Institute of Applied Ecology, Chinese Academy of Sciences, ShenYang,

LiaoNing, P. R. China

*Corresponding authors: Tel: +86-10-89734284; Fax: +86-10-89734284; E-mail

address: sssun33@163.com

Supporting Materials

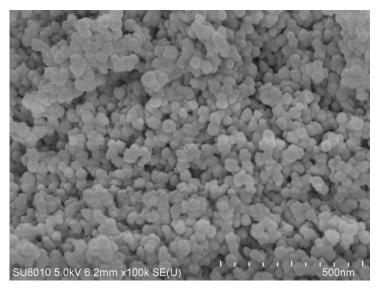


Figure S1. Scanning electron micrograph of utilized SiO₂ nanoparticles.

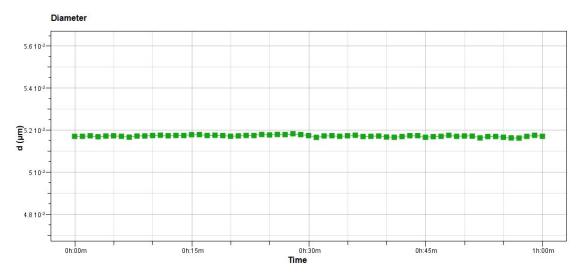


Figure S2 The size of nanoparticles in bionanofluid measured by dynamic light scattering.