
Supporting Information

Reprocessable epoxy resins based on hydroxy-thioester and thiol-thioester dual exchanges

Yumin Yang^{a b}, Qingfei Song^{a b}, Chunmei Li^{*a b}, Jiaojun Tan^{a c}, Ying Xue^{a b},

Zhengzhou Su^{a b}, Guoxian Zhang^{a b}, Qiuyu Zhang^{*a b}

^aKey Laboratory of Special Functional and Smart Polymer Materials of Ministry of Industry and Information Technology, School of Chemistry and Chemical Engineering, Northwestern Polytechnical University, Xi'an, China

^bResearch & Development Institute of Northwestern Polytechnical University in Shenzhen, Shenzhen, 518057, China

^cCollege of Bioresources Chemical and Materials Engineering, Shaanxi University of Science and Technology, Xi'an, China;

*Corresponding author.

Email: lichunmei@nwpu.edu.cn (C. Li); qyzhang@nwpu.edu.cn (Q. Zhang).

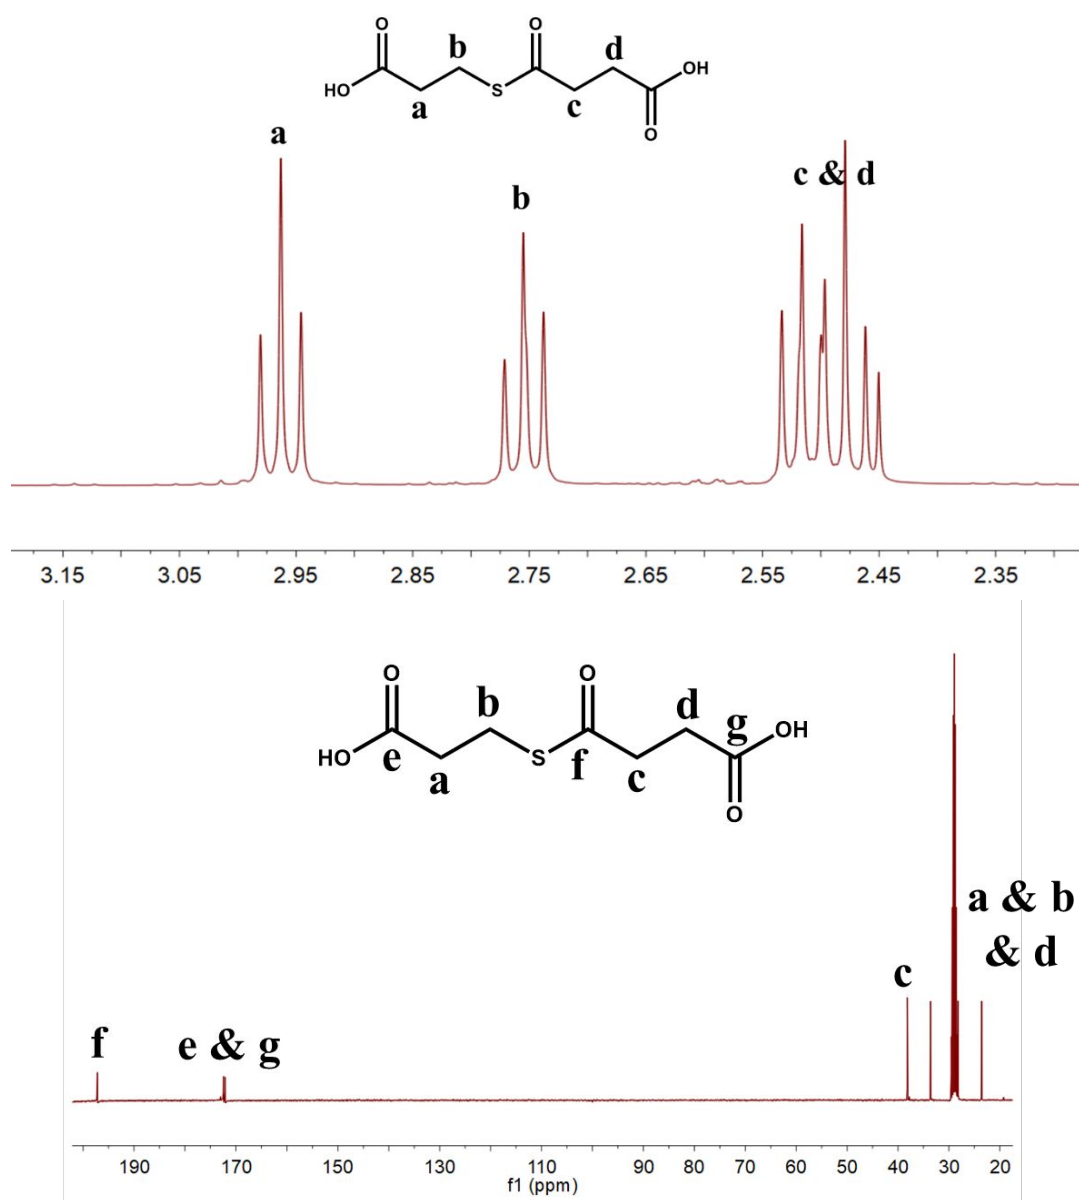


Figure S1 NMR spectrum of CTOA. Top: ^1H NMR. Bottom: ^{13}C NMR



Figure S2 EER is degraded by thiol and continues to be used for epoxy E51 curing.



Figure S3 Test of supporting weights after shape memory. (a, c, d) three views of the load bearing material; (b) epoxy resin for support. (Epoxy resin weighs 0.7644g, weight iron block weighs 1845.5g).