Supplementary information

High Aspect Ratio Electrospun CuO Nanofibers as Anode Material for Lithium-ion Batteries with Superior Cycleability

Rahul Sahay[a,b#], Palaniswamy Suresh Kumar[a,b#], Vanchiappan Aravindan[c#], Jayaraman Sundaramurthy[a,b], Wong Chui Ling[c], Subodh G. Mhaisalkar[a,c], Seeram Ramakrishna[b,d*] Srinivasan Madhavi[a,c*]

[a]School of Materials Science and Engineering, Nanyang Technological University, 50 Nanyang Avenue, Singapore 639798

[b]NUS Nanoscience and Nanotechnology Initiative, National University of Singapore, Singapore 117576

[c] Energy Research Institute @ NTU (ERI@N), Nanyang Technological University, Research Techno Plaza, 50 Nanyang Drive, Singapore 637553, Singapore

[d]Center for Nanofibers and Nanotechnology, National University of Singapore, Singapore 117576

# Contributed equally

[*] E-mail: seeram@nus.edu.sg (S. Ramakrishna)

E-Mail: Madhavi@ntu.edu.sg (S. Madhavi),

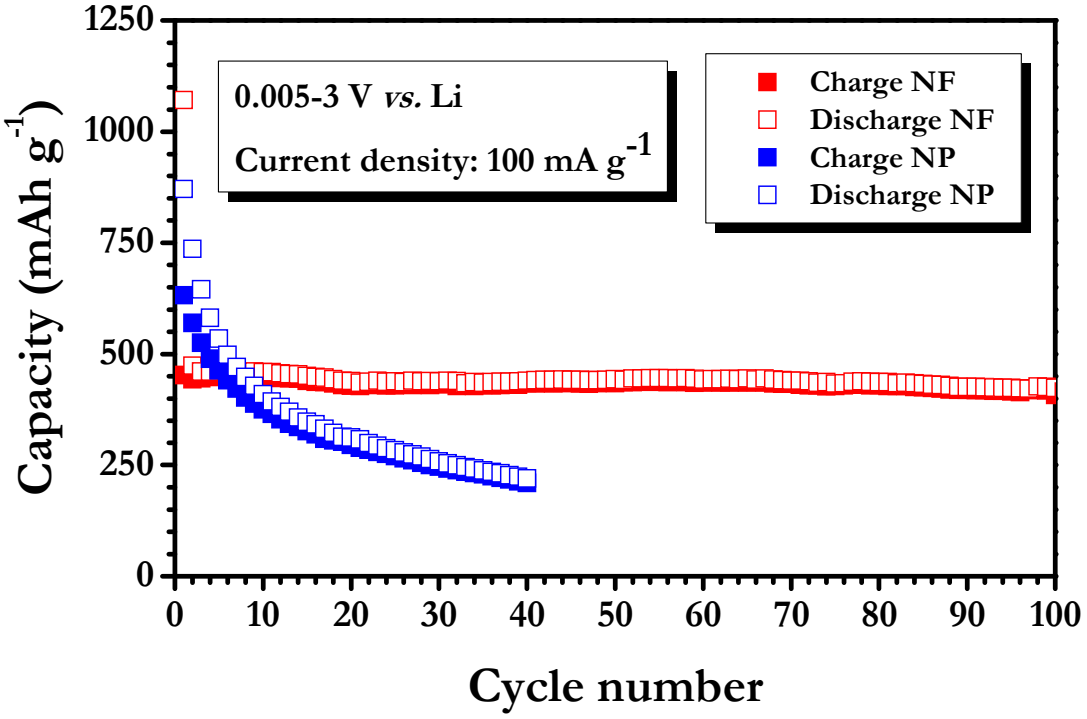

Typical galvanostatic cycling profiles of electrospun nanofibers (NF) and nanoparticles (NP) in half-cell configurations are cycled between 0.005-3 V *vs.* Li at constant current density of 100 mA g^{-1} in room temperature