Supporting Information

Composite Fuel Cell Membranes from Dual-Nanofiber Electrospun Mats Jason B. Ballengee and Peter N. Pintauro*

Department of Chemical and Biomolecular Engineering, Vanderbilt University, 2400 Highland Avenue, Nashville, TN 37212, USA

*Author for all correspondence: peter.pintauro@vanderbilt.edu

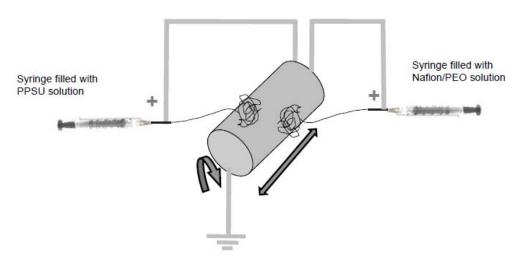


Figure S1. Schematic of dual-fiber electrospinning experiment. The collecting drum rotates and oscillates horizontally for random orientation and uniform distribution of the nanofibers.

Table S1. Limiting current measurements from accelerated lifetime testing.

Time (hours)	Limiting Current - Nafion 212 (mA/cm ²)	Limiting Current - Nanofiber Composite (mA/cm ²)
(10013)	(IIIA/CIII) 1.5	(MA/CM) 1.9
515	>13	5.2
845	n/a	>13