

Figure S1: Percentage of area fraction of β peak as a function of beam current evaluated from the respective peak area given in figure 1 (b).

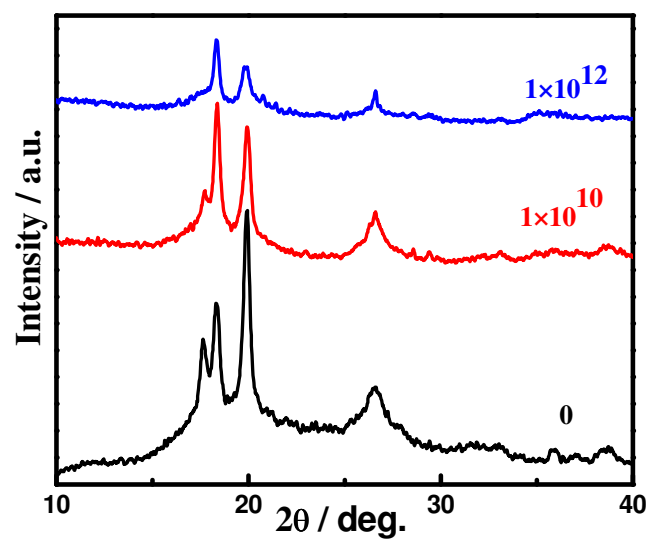


Figure S2: XRD patterns of pure PVDF and irradiated PVDF at different fluences having 0.5 pA beam current. The number “0” indicates the zero fluence.