Micropatterned Surfaces through Moisture-Induced

Phase-Separation of Polystyrene-Clay Nanocomposite

Particles

Bindu P. Nair and Chorappan Pavithran*

Materials and Minerals Division

National Institute for Interdisciplinary Science and Technology (NIIST)

Council of Scientific and Industrial Research (CSIR)

Thiruvananthapuram-695019, India

Fax: 0091-471-2491712

E-mail: cpniist@gmail.com

Supporting Information- Figure Captions

Figure S1. SEM image (Low magnification) of PCN micropatterned film from 20 mgmL⁻¹ PCN/THF.

Figure S2. SEM image (high magnification) of PCN micropatterned film from 20 mgmL⁻¹/THF.

Figure S3. Optical transmission micrographs of PCN drop cast from THF of solution concentration of (a) 1 (b) 5 (c) 10 (d) 20 and (e) 50 mgmL⁻¹. Scale bar represents (a & e) 20 μm, (b, c & d) 10 μm.

Supporting Information-Figures

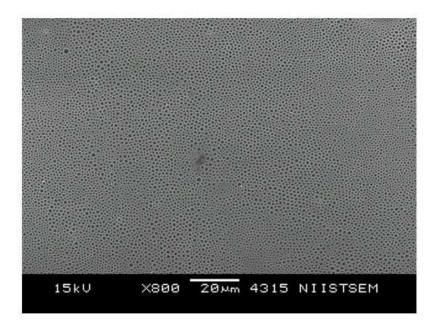


Figure S1. SEM image (Low magnification) of PCN micropatterned film from 20 mgmL⁻¹ PCN/THF.

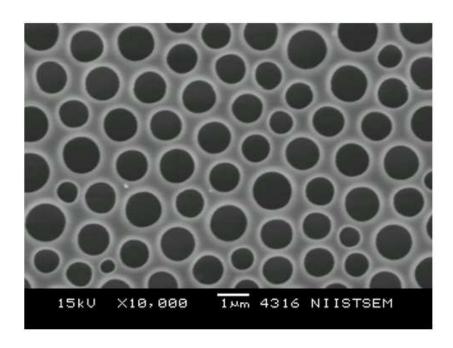


Figure S2. SEM image (high magnification) of PCN micropatterned film from 20 mgmL⁻¹ PCN/THF.

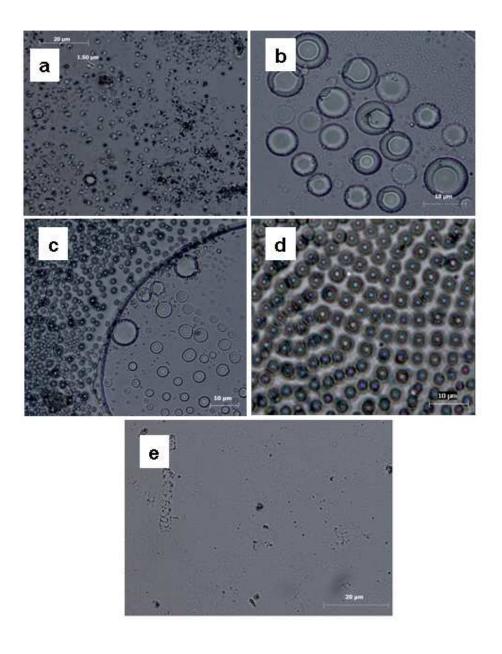


Figure S3. Optical transmission micrographs of PCN drop cast from THF of solution concentration (a) 1 (b) 5 (c) 10 (d) 20 and (e) 50 mgmL⁻¹. Scale bar represents (a & e) 20 μ m, (b, c & d) 10 μ m.