


## SUPPORTING INFORMATION

# Use of Poly(ethylene oxide) macroRAFT agent as both a stabilizer and a control agent in styrene polymerization in aqueous dispersed system

*A. Martins dos Santos<sup>b</sup>, T. Le Bris<sup>a</sup>, C. Graillat<sup>a</sup>, F. D'Agosto<sup>a</sup>, M. Lansalot<sup>a</sup>*

<sup>a</sup>LCPP team-C2P2, UMR 5265 (CNRS/ESCPE/UCB Lyon 1), 43 boulevard du 11 Novembre 1918, BP 2077, 69616 Villeurbanne, France

<sup>b</sup>Laboratório de Polímeros, Departamento de Engenharia Química, Escola de Engenharia de Lorena - USP, Estrada Municipal do Campinho, s/nº, CP 116, 12.602.810, Lorena (SP), Brasil.

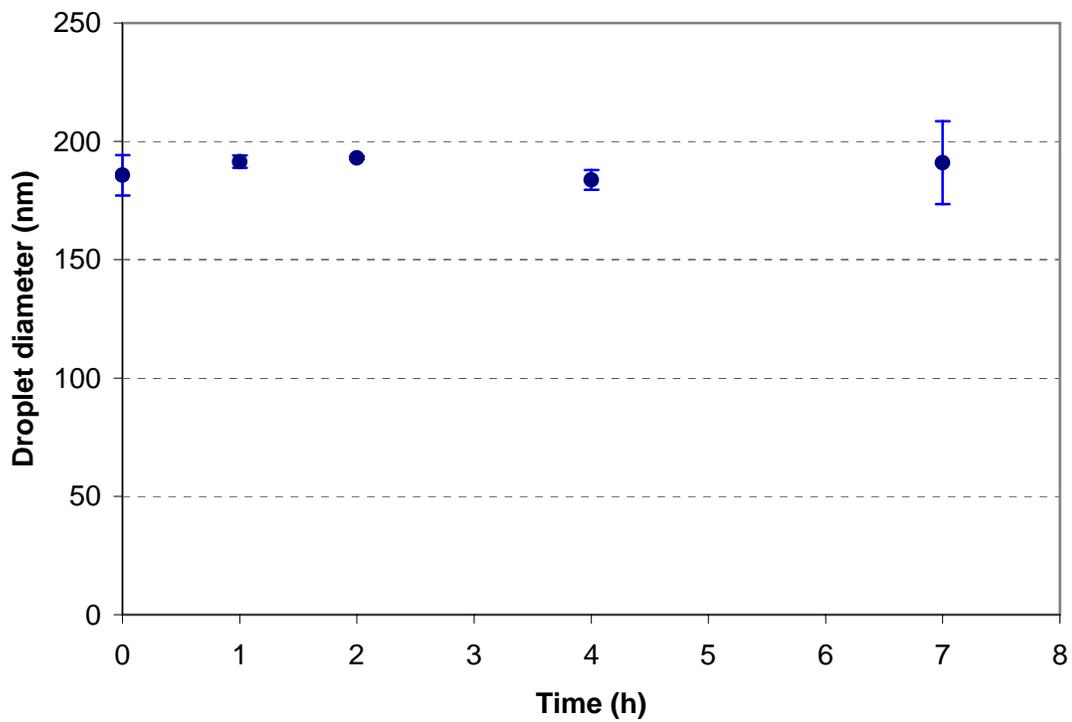

**Figure S1:** Aging of the droplet diameter with time for a styrene miniemulsion (10 wt % of styrene; hexadecane: 5.2 wt %/styrene; [PEO-RAFT] =  $2.2 \times 10^{-3} \text{ mol.L}^{-1}_{em}$ )